



FOCUSED ON APPLICATION HVAC



Unit information		
Chiller Model	CA2-485-4210	
Width:	2,250.00 mm	88.58 in
Length:	11,970.00 mm	471.26 in
Height:	2,520.00 mm	99.21 in
Shipping Weight:	12,040.00 Kgs	26,543.65 Lbs
Operating Weight:	12,240.00 Kgs	26,984.58 Lbs
Capacity Control	Stepless Control	
Refrigerant:	R134a	
Refrigerant(Ckt1 / Ckt2):	290.00 Kgs	290.00 Kgs
Starting Control:	Y-Δ	

Performance Information(Cooling Condition)		
Cooling Capacity:	1,715.00 Kw	485.00 Tons
Entering Water Temp:	12.00 °C	53.60 °F
Leaving Water Temp:	7.00 °C	44.60 °F
Ambient Temperatura (DB):	35.00 °C	95.00 °F
Water Flow (Max):	295.00 m³/hr	1,298.85 Gpm
Input Power (Electrical):	510.80 Kw	
IPLV/NPLV (W/W - Btu /w):	4.83 EER (W/W)	16.50 EER (Btu/w)
COP (W/W - Btu /w):	3.36 EER (W/W)	11.48 EER (Btu/w)

Compressor Information		
Brand:	Bitzer	
Model:	CSH9593-300Y-40D	
Type Compressor:	Semi-Hermetic Screw	
Maximal Amperaje Control:	402.00 Amperes	
Quantity:	2.00 Piece	
Oil Model (by compressor):	BSE170	1,055.90 Oz
Capacity Regulating Range:	25.0% - 100.0 %	

Water Side Heat Exchanger Information		
Fluid Type:	Fresh Water	
Nozzle Type:	Victaulic Couping	
Water Volume:	304.00 Lts	80.31 Galons
Heat Exchanger Type:	Flooded Shell-and-Tube	
Fouling Factor:	0.018 m².K/kW	0.1021 ft².F/Btu
Nozzle Size(DN):	200.00 mm	8.00 in
Water Pressure Drop:	73.00 kPa	24.42 ft CA
Design Pressure of Water Side (Max):	1.00 MPa	145.04 Psi

Air Side Heat Exchanger Information		
Type:	Fine-Tube	
Fan Quantity:	20.00 Units	
Air Flow:	450,000.00 m³/hr	264,859.65 Cfm
Fan Power Input:	2.20 Kw/Unit	44.00 Kw Total

Electrical Conections		
Amperaje	Electrical Circuit 1	Electrical Circuit 2
Maximum operating current (MCA):	455.00 Amp	455.00 Amp
Maximum Overcurrent Protection (MOCP):	630.00 Amp	630.00 Amp

Electrical Information		
Power Supply:	460Volts / 3 Phases / 60 Hertz	
Voltaje Range:	440 Volts	480 Volts
Rating Current (A):	711.00 Amp	
Max. Starting Current (A):	1,260.00 Amp	
Maximum operating current (A)	910.00 Amp	

Electrical Panel	Electrical Circuit 1	Electrical Circuit 2
Point Conection Electrical:	Panel E-1	Panel E-2



- * Garantía 2 Años en partes y en compresores
- * Resortes anti-vibratorios

- * Refrigerante Ecologico
- * Conexiones de Tuberia ranurada (Victaulic)



IPLV/NPLV Points (SI)

Load %	Cooling Capacity (Kw)	Input Power (Kw)	Cooling kW/Ton	Cooling COP (w/w)	Evap. WPD (kPa)	DBT (°C)	EEWT (°C)	ELWT (°C)
100	1,717.00 Kw	511.00 Kw	0.9393 Kw/Tons	3.36 W/W	61.00 kPa	35.00 °C	12.50 °C	7.00 °C
75	1,288.00 Kw	314.90 Kw	0.7716 Kw/Tons	4.09 W/W	61.00 kPa	27.00 °C	11.10 °C	7.00 °C
50	859.00 Kw	157.90 Kw	0.5801 Kw/Tons	5.44 W/W	61.00 kPa	19.00 °C	9.70 °C	7.00 °C
25	429.30 Kw	80.30 Kw	0.5903 Kw/Tons	5.35 W/W	61.00 kPa	19.00 °C	8.40 °C	7.00 °C

$$IPLV.SI/NPLV.SI=0.01*A+0.42*B+0.45*C+0.12*D=4.024$$

A=EER At 100%; B=EER At 75%; C=EER At 50%; D=EER At 25%;

Soft in accordance with the AHRI Water-Cooled Water-Chilling and Heat Pump Water-Heating Packages Using Vapor Compression Cycle , which is based on AHRI Standard 550/590 (I-P) and AHRI Standard 551/591 (SI).

IPLV/NPLV Points (IP)

Load %	Cooling Capacity (Tons)	Input Power (Kw)	Cooling kW/Ton	Cooling COP (Btu/w-h)	Evap. WPD (ft CA)	DBT (°F)	EEWT (°F)	ELWT (°F)
100	488.66 Tons	511.00 Kw	0.9393 Kw/Tons	11.48 EER (Btu/w-h)	20.41 ft CA	95.00 °F	54.50 °F	44.60 °F
75	366.56 Tons	314.90 Kw	0.7716 Kw/Tons	13.97 EER (Btu/w-h)	20.41 ft CA	80.60 °F	51.98 °F	44.60 °F
50	244.47 Tons	157.90 Kw	0.5801 Kw/Tons	18.58 EER (Btu/w-h)	20.41 ft CA	66.20 °F	49.46 °F	44.60 °F
25	122.18 Tons	80.30 Kw	0.5903 Kw/Tons	18.26 EER (Btu/w-h)	20.41 ft CA	66.20 °F	47.12 °F	44.60 °F

$$IPLV.SI/NPLV.SI=0.01*A+0.42*B+0.45*C+0.12*D=4.024$$

A=EER At 100%; B=EER At 75%; C=EER At 50%; D=EER At 25%;


Soft in accordance with the AHRI Water-Cooled Water-Chilling and Heat Pump Water-Heating Packages Using Vapor Compression Cycle , which is based on AHRI Standard 550/590 (I-P) and AHRI Standard

Ten Points Parameters(Constant Ambient Temp.)

Load %	Cooling Capacity (Tons)	Input Power (Kw)	Cooling kW/Ton	Cooling COP (Btu/w-h)	Evap. WPD (ft CA)	DBT (°F)	EEWT (°F)	ELWT (°F)
100	488.66 Tons	511.00 Kw	0.9393 Kw/Tons	11.48 EER (Btu/w-h)	20.41 ft CA	95.00 °F	54.50 °F	44.60 °F
90	439.70 Tons	464.90 Kw	0.9497 Kw/Tons	11.35 EER (Btu/w-h)	20.41 ft CA	95.00 °F	53.42 °F	44.60 °F
80	391.04 Tons	421.50 Kw	0.9682 Kw/Tons	11.13 EER (Btu/w-h)	20.41 ft CA	95.00 °F	52.52 °F	44.60 °F
70	342.09 Tons	380.60 Kw	0.9993 Kw/Tons	10.79 EER (Btu/w-h)	20.41 ft CA	95.00 °F	51.44 °F	44.60 °F
60	293.14 Tons	342.20 Kw	1.0485 Kw/Tons	10.28 EER (Btu/w-h)	20.41 ft CA	95.00 °F	50.54 °F	44.60 °F
50	244.47 Tons	255.50 Kw	0.9393 Kw/Tons	11.48 EER (Btu/w-h)	20.41 ft CA	95.00 °F	49.46 °F	44.60 °F
40	195.52 Tons	210.70 Kw	0.9679 Kw/Tons	11.14 EER (Btu/w-h)	20.41 ft CA	95.00 °F	48.56 °F	44.60 °F
20	146.57 Tons	171.10 Kw	1.0485 Kw/Tons	10.28 EER (Btu/w-h)	20.41 ft CA	95.00 °F	47.48 °F	44.60 °F

For single COMP chiller, the 10% and 20% load are out of running range, so the data is only for reference;For double COMP chiller, the 10% load are out of running range, so the data is only for reference

Chiller Model: CA2-485-4210


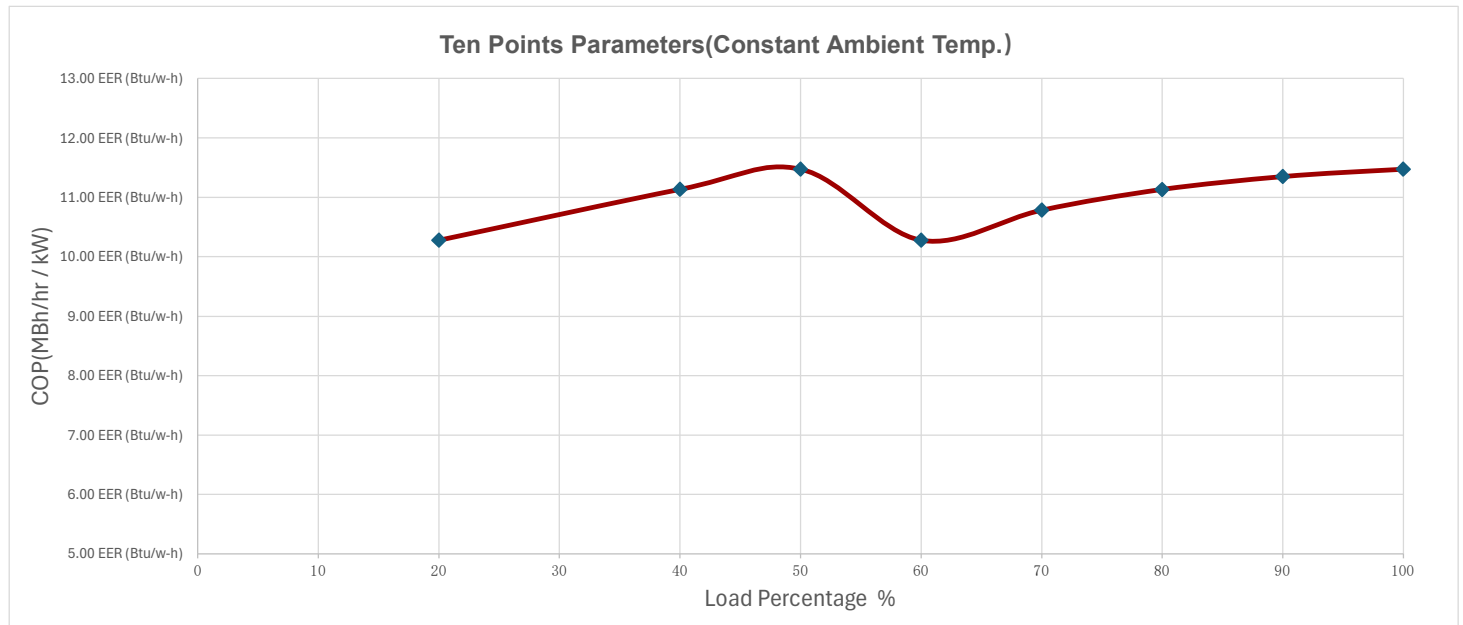


Ten Points Parameters(Variable Ambient Temp.)



Load %	Cooling Capacity (Tons) (Dual Compressor)	Input Power (Kw)	Cooling kW/Ton	Cooling COP (Btu/w-h)	Evap. WPD (ft CA)	DBT (°F)	EEWT (°F)	ELWT (°F)
100	488.66 Tons	511.00 Kw	0.9393 Kw/Tons	11.48 EER (Btu/w-h)	20.41 ft CA	95.00 °F	54.50 °F	44.60 °F
90	439.70 Tons	421.00 Kw	0.8600 Kw/Tons	12.53 EER (Btu/w-h)	20.41 ft CA	89.24 °F	53.42 °F	44.60 °F
80	391.04 Tons	346.70 Kw	0.7964 Kw/Tons	13.53 EER (Btu/w-h)	20.41 ft CA	83.48 °F	52.52 °F	44.60 °F
70	342.09 Tons	284.60 Kw	0.7473 Kw/Tons	14.42 EER (Btu/w-h)	20.41 ft CA	77.72 °F	51.44 °F	44.60 °F
60	293.14 Tons	233.00 Kw	0.7139 Kw/Tons	15.10 EER (Btu/w-h)	20.41 ft CA	71.96 °F	50.54 °F	44.60 °F
50	244.47 Tons	157.90 Kw	0.5801 Kw/Tons	18.58 EER (Btu/w-h)	20.41 ft CA	66.20 °F	49.46 °F	44.60 °F
40	195.52 Tons	119.20 Kw	0.5476 Kw/Tons	19.68 EER (Btu/w-h)	20.41 ft CA	60.44 °F	48.56 °F	44.60 °F
20	146.57 Tons	89.70 Kw	0.5497 Kw/Tons	19.61 EER (Btu/w-h)	20.41 ft CA	55.40 °F	47.48 °F	44.60 °F

For single COMP chiller, the 10% and 20% load are out of running range, so the data is only for reference;For double COMP chiller, the 10% load are out of running range, so the data is only for reference

Chiller Model: CA2-485-4210

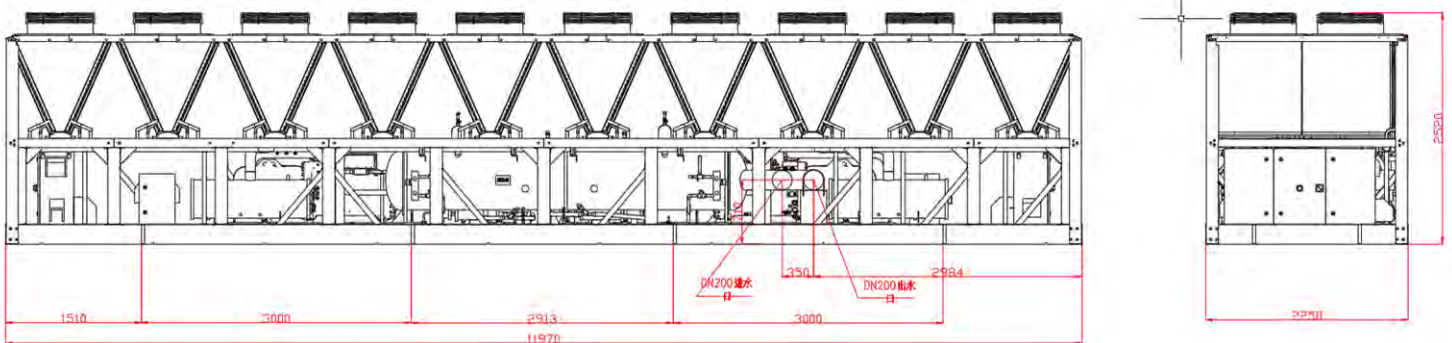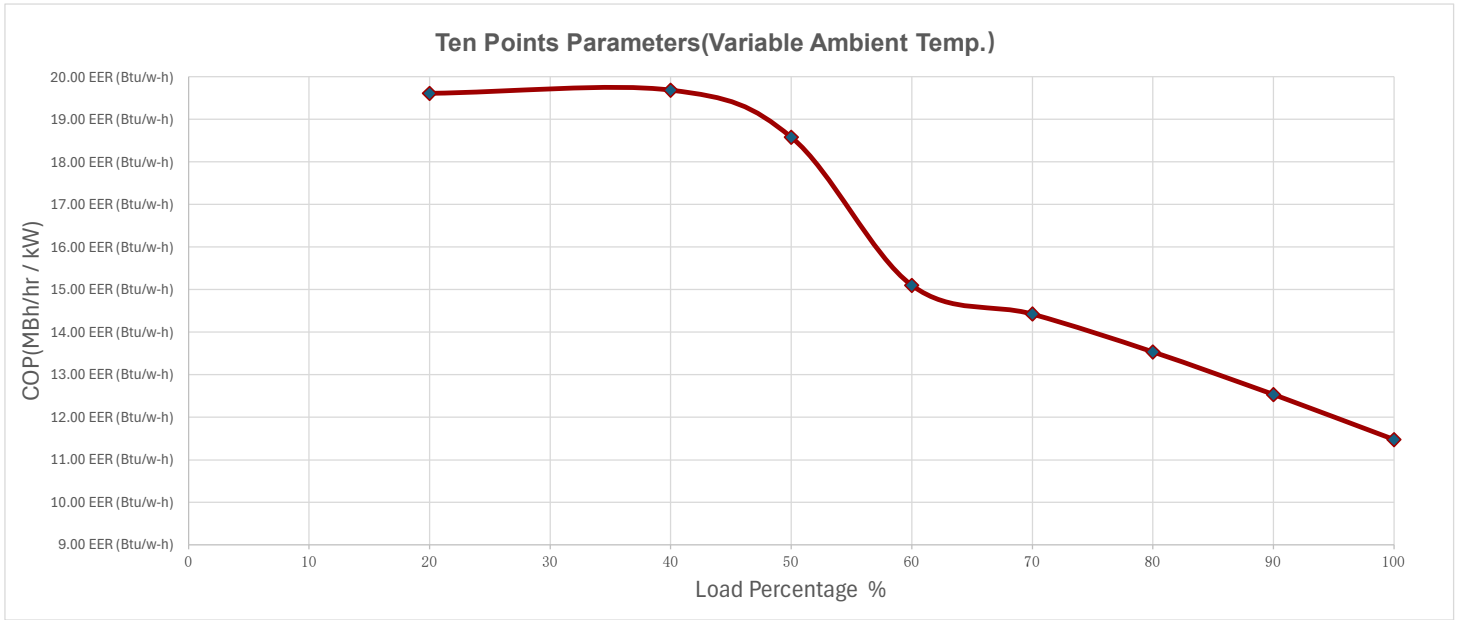

Dimension Model: CA2-485-4210	Length	Width	Height
	11,970.00 mm	2,250.00 mm	2,520.00 mm

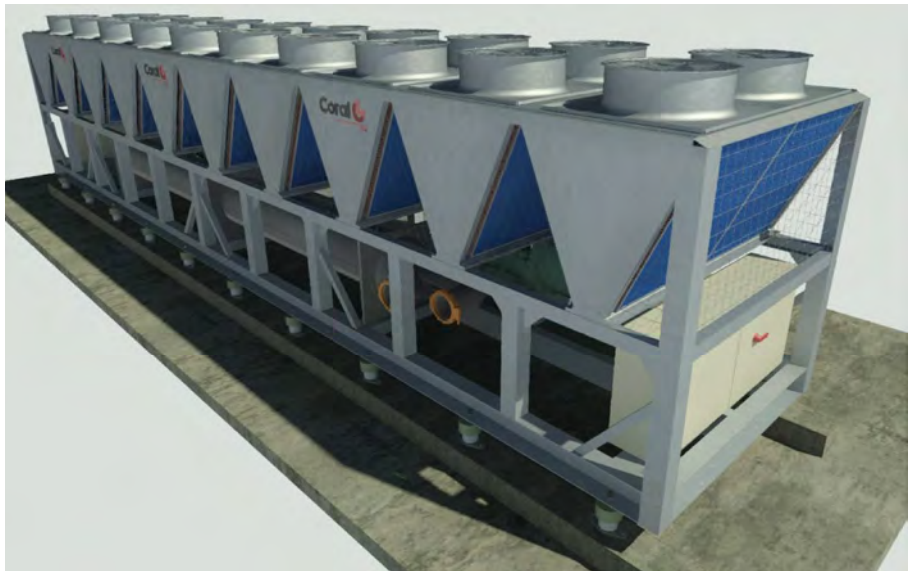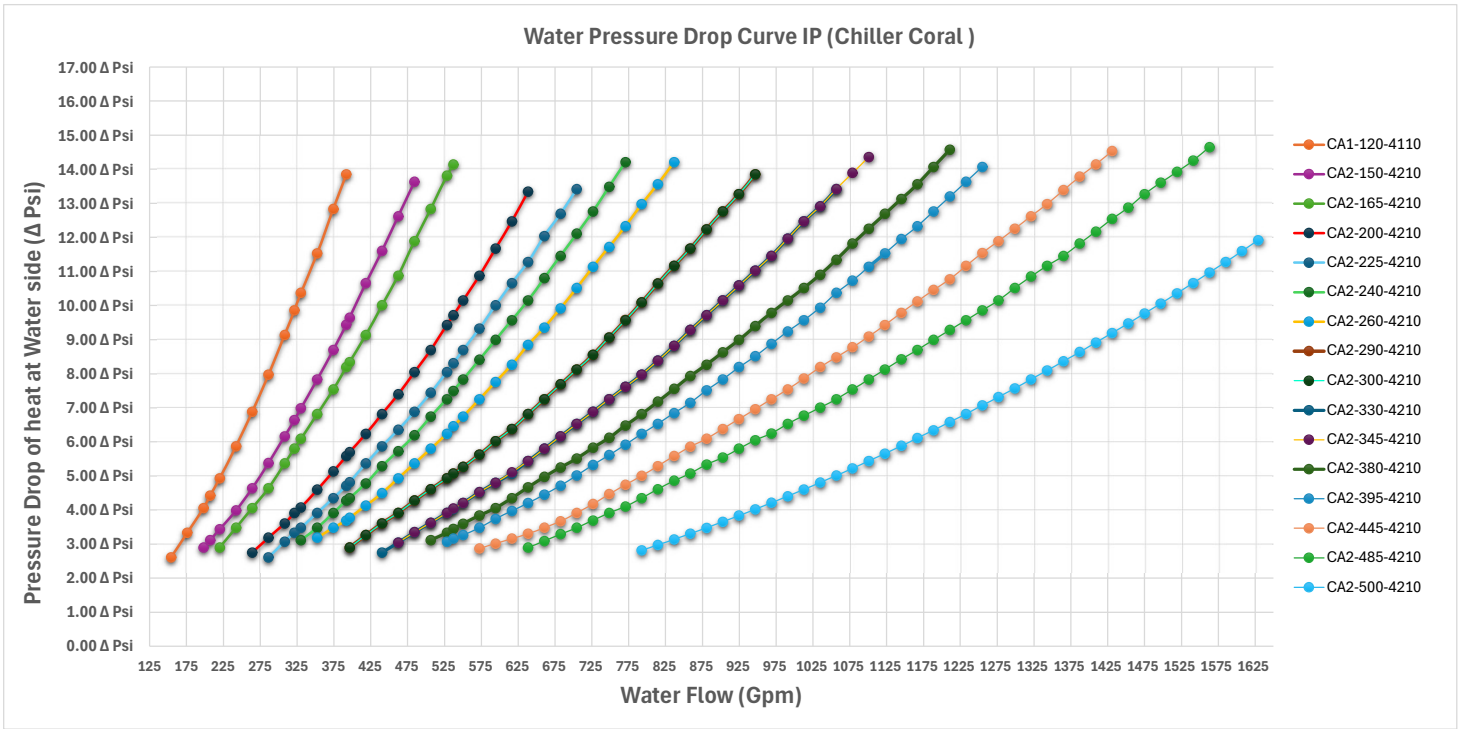

CA2-485-4210		
Cooling Capacity:	1,715.00 Kw	485.00 Tons
Water Flow (Max):	295.00 m ³ /hr	1,298.85 Gpm
Width:	2,250.00 mm	88.58 in
Length:	11,970.00 mm	471.26 in
Height:	2,520.00 mm	99.21 in
Fan Quantity:	20.00 Units	
Nozzle Size(DN):	200.00 mm	8.00 in
Operating Weight:	12,240.00 Kgs	26,984.58 Lbs